


Lanț calibrat DIN 766-3

Chain, calibrated DIN 766-3


Diametru d mm	Portanța WLL/Kg	P mm	Le mm	Greutate kg/m
4	200	16	14	0,32
5	320	18,5	17	0,50
6	400	18,5	20	0,75
7	630	22	23	1,00
8	800	24	26	1,35
10	1250	28	34	2,25
13	2000	36	44	3,80
14	2500	41	47	4,40
16	3200	45	54	5,80
18	4000	50	60	7,30
20	5000	56	67	9,00
23	6300	64	83	12,00
26	8000	73	94	15,00
28	10000	78	101	18,00
30	11200	84	108	20,00

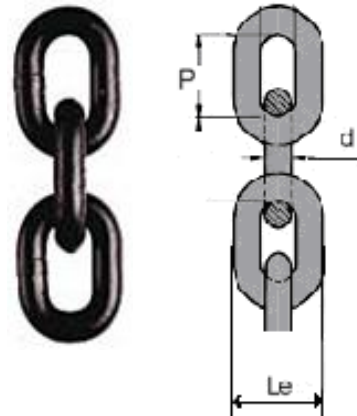

Lanț de ridicare G80 conform EN 818-2

High tensile G 80 chain EN 818-2

TIP d mm	Portanța WLL/Kg	P mm	Li mm	Le mm	Greutate kg/m
8 - 6	1120	18	7,8	22,2	0,80
8 - 7	1500	21	9,1	25,9	1,10
8 - 8	2000	24	10,4	29,6	1,40
8 - 10	3150	30	13,0	37,0	2,20
8 - 13	5300	39	16,9	48,1	3,80
8 - 16	8000	48	20,8	59,2	5,70
8 - 20	12500	60	26,0	74	9,00
8 - 22	15000	66	28,6	81,4	10,90
8 - 26	21200	78	33,8	96,2	15,20
8 - 32	31500	96	41,6	118	23,00

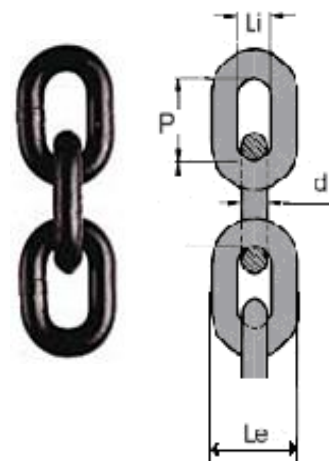

DISPOZITIVE DE RIDICARE CU LANȚ

Aceste lanțuri de ridicare pot fi utilizate la aceleași operațiuni ca și dispozitivele din cablu de oțel sau din chingă de poliester. Pot fi utilizate de la -40°C până la +200°C fără a pierde din portanță.

These chain slings are used for the same purpose as the wire rope slings or polyester slings. They can be used between -40°C and +200°C without loss of the working load limit. Parts of chain slings can be easily replaced or changed.

TIP D



TIP G



3 BRAȚE



TIP H



TIP F




TIP mm	1 braț	2 brațe		3 brațe / 4 brațe		Circulare
		0° - 45°	45° - 60°	0° - 45°	45° - 60°	
Portanța WLL/kg						
8 - 6	1120	1600	1120	2360	1700	1800
8 - 8	2000	2800	2000	4250	3000	3150
8 - 10	3150	4250	3150	6700	4750	5000
8 - 13	5300	7500	5300	11200	8000	8500
8 - 16	8000	11200	8000	17000	11800	12500
8 - 20	12500	17000	12500	26500	19000	20000
8 - 22	15000	21200	15000	31500	22400	23600
8 - 26	21200	30000	21200	45000	31500	33500
8 - 32	31500	45000	31500	67000	47500	50000



G 80 inel simplu DIN 5688-86

G 80 master link


TIP	Dimensiune	Portanța WLL/To	A mm	B mm	D mm	Greutate kg
8 - 6	A 13	1,60	110	60	13	0,34
8 - 7/8	A 16	2,12	110	60	16	0,54
8 - 8	A 18	3,15	135	75	18	0,82
8 - 10	A 22	5,30	160	90	22	1,50
8 - 13	A 26	8,00	180	100	26	2,32
8 - 16	A 32	11,20	200	110	32	3,95
8 - 18	A 36	14,00	260	140	36	6,34
8 - 20	A 40	17,00	300	160	40	8,96
8 - 22	A 45	21,20	340	180	45	12,80
8 - 26	A 50	31,50	350	190	50	16,55
8 - 32	A 56	45,00	400	200	56	23,28
8 - 72	A 72	63,00	460	250	72	45,76



G 80 inel triplu (pentru dispozitiv din lanț)

G 80 master link assembly (for chain slings)


TIP	Dimensiune	Portanța WLL/To	B mm	D mm	L mm	B1 mm	D1 mm	L1 mm	Greutate kg
8 - 6	19x13	2,36	75	18	135	25	13	54	1,18
8 - 7/8	23x16	4,25	90	22	160	34	16	70	2,20
8 - 10	27-18	6,70	100	26	180	40	18	85	4,00
8 - 13	33x23	11,20	110	32	200	50	22	115	6,10
8 - 16	36x27	17,00	140	36	260	65	26	140	9,80
8 - 20	50x33	26,50	190	50	350	100	32	180	22,60
8 - 22	50x36	31,50	190	50	350	100	36	180	25,20



G 80 inel triplu (pentru dispozitiv din cablu)

G 80 master link assembly (for wire rope slings)


TIP	Dimensiune	Portanța WLL/To	D mm	B mm	L mm	D1 mm	L1 mm	B1 mm	Greutate kg
8 - 7	20x13	5,50	20	95	160	13	110	60	1,9
8 - 10	26x20	9,40	26	110	190	20	160	95	4,87
8 - 13	32x26	14,20	32	130	230	26	190	110	9,38
8 - 16	38x30	22,30	38	150	275	30	230	130	15,28
8 - 20	45x32	33,50	45	180	340	32	230	130	21,78
8 - 22	50x38	40,80	50	190	350	38	275	150	31,52

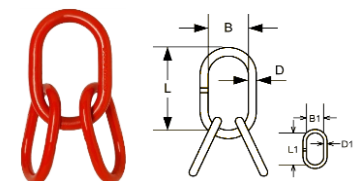

G 80 cârlig cu ochi și siguranță

G 80 eye sling hook


TIP	Portanța WLL/To	O mm	D mm	A mm	R mm	H mm	G mm	Greutate kg
8 - 6	1,12	20	9	24	80	19	14,5	0,3
8 - 7/8	2,00	25	11	30	98	24	19	0,4
8 - 10	3,15	38	15	34	120	32	23,5	0,9
8 - 13	5,30	43	19	39	153	42	29	1,7
8 - 16	8,00	50	23	46	185	48	35,5	3,2
8 - 20	12,50	62	24	61	217	53	48	5,8
8 - 22	15,00	62	32	71	224	60	51,5	8,5
8 - 26	21,20	64	35	81	237	75	60	13
8 - 32	32,50	88	37	102	259	89	71	17



G 80 cârlig cu ochi și autoblocare

G 80 eye self locking hook


TIP	Portanța WLL/To	A mm	P mm	H mm	K mm	D mm	T mm	Greutate kg
8 - 6	1,12	21	7,5	20,5	110,5	10	15,5	0,46
8 - 7/8	2,0	24	35	25	136	12	20	0,79
8 - 10	3,15	30	43	31	171	15	27	1,52
8 - 13	5,30	40	51	42	208,5	19,5	32	2,87
8 - 16	8,00	60	82	53	257,5	22	45	5,69
8 - 20	12,50	63	88	58	275	27	47	7,15
8 - 22	15,00	70	88	64	320	30	48	14,00
8 - 26	21,20	80	110	75	363	34	75	18,00



G 80 cârlig rotativ

G 80 rotating hook


TIP	Portanța WLL/To	A mm	B mm	P mm	H mm	K mm	D mm	Greutate kg
8 - 6	1,12	32,5	23	27,5	20,5	149	12	0,70
8 - 7/8	2,00	36	26	34	25	187	12,5	0,85
8 - 10	3,15	42	34	43	31	223	15,5	1,54
8 - 13	5,30	49	41	51	42	268	17	3,04
8 - 16	8,00	61	53	82	53	330	22	5,36
8 - 20	10,00	79	58	61	67	332	32	10,60
8 - 22	15,00	105	114	81	76	431	40	21,40
8 - 26	20,00	105	105	82,5	91	472	40	32,00



G 80 cârlig rotativ și autoblocare

G 80 rotating self locking hook


TIP	Portanța WLL/To	A mm	B mm	P mm	H mm	K mm	D mm	Greutate kg
8 - 6	1,12	32,5	22	34	21	149	11,2	0,70
8 - 7/8	2,00	35,5	26	46	26	188	12,5	1,10
8 - 10	3,15	42	34	56	28	219	15	2,00
8 - 13	5,30	50	38,5	69	41	261	16	4,00
8 - 16	8,00	61	55	86	53	330	21,5	7,30



G 80 cârlig de turnătorie

G 80 foundry hook


TIP	Portanța WLL/To	A mm	D mm	P mm	K mm	H mm	T mm	Greutate kg
8 - 7/8	2,00	18	12	63,5	120	31	25	1,09
8 - 10	3,15	22	16	76	146	33	32	1,95
8 - 13	5,30	27	19	89	175	44,5	38	3,22
8 - 16	8,00	32	20	102	205	51,5	46	5,26
8 - 20	12,50	38	25	110	235	65	56	9,07
8 - 22	15,00	45	28,5	127,5	264	68,5	57	11,79



G 80 cârlig de container

G 80 clevis container link


TIP	Portanța WLL/To	A mm	B mm	C mm	D mm	F mm	Greutate kg
8-13	5,30	15	60	72	104	194	1,6



G 80 cârlig culisant

G 80 sliding choke hook


TIP	Portanța WLL/To	A mm	B mm	C mm	D mm	Greutate kg
8 - 6	1,60	17	71	132	50	0,68
8 - 7/8	2,00	22	79	151,5	63,5	1,21
8 - 10	3,00	28	103	170	69	1,99
8 - 13	5,00	32,5	105	213	85,7	4,18



G 80 cârlig pentru lanț

G 80 clevis sling hook


TIP	Portanța WLL/To	R mm	H mm	G mm	A mm	Greut. kg
8 - 6	1,12	76	23	15,5	26	0,32
8 - 7/8	2,00	85,5	32,5	19	29	0,52
8 - 10	3,15	104	35	25,5	39	1,05
8 - 13	5,30	128	42,5	29,5	47	2,00
8 - 16	8,00	150	54	37,5	55	3,70
8 - 20	12,50	180	58	51	61	6,00
8 - 22	15,00	213	62	60	72	10,4



G 80 cârlig pentru lanț cu autoblocare

G 80 self locking clevis hook


TIP	Portanța WLL/To	A mm	B mm	C mm	D mm	F mm	Greut. kg
8 - 6	1,12	34	29	19,5	95,5	8,5	0,50
8 - 7/8	2,00	46	34	24	121	9,5	0,86
8 - 10	3,15	56	44	28,5	146	12	1,50
8 - 13	5,30	69	52	40	182	15	2,80
8 - 16	8,00	86	60	50,5	218	18	5,60
8 - 20	12,50	95	83	55	240	25	7,50
8 - 22	15,00	98	88	67	276,5	25,5	11,50

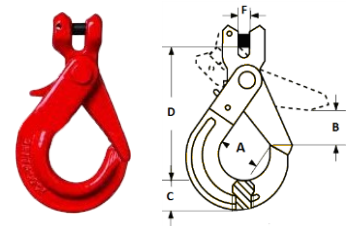

G 80 scurtător de lanț

G 80 shortening clutch


TIP	Portanța WLL/To	A mm	B mm	C mm	D mm	E mm	F mm	P mm	Greut. kg
8 - 6	1,12	7,5	7,5	8,0	8	19	45	7,5	0,17
8 - 7/8	2,00	9,5	9,5	10,0	9,5	23,5	56	9	0,41
8 - 10	3,15	13	13	15,0	9,5	23,5	56	10	0,97
8 - 13	5,30	18	16	19,0	12	32,5	78	13	2,01
8 - 16	8,00	21	21	20,5	15,5	44	90	16	3,22
8 - 20	12,50	22,0	22	24,0	19	50	106	21	6,20
8 - 22	15,00	25,5	25,5	26	23	56	120	26	8,50



G 80 scurtător de lanț

G 80 clevis shortening hook


TIP	Portanța WLL/To	A mm	B mm	E mm	M mm	L mm	Gerut. kg
8 - 6	1,12	8	32	8	44	75	0,25
8 - 7/8	2,00	10	39	11	56	93	0,32
8 - 10	3,15	13	46	14	74	127	0,71
8 - 13	5,30	17	56	18	84	154	1,38
8 - 16	8,00	21,5	73,5	21	113	184	2,62
8 - 20	12,50	24,0	77	24	127	212	4,13
8 - 22	15,00	27	91	27	148	247	6,00
8 - 26	21,20	33	107	30	-	296	8,80



G 80 cuplă de lanț

G 80 connecting link


TIP	Portanța WLL/To	A mm	B mm	K mm	D mm	Greut. kg
8 - 6	1,12	15	18	42	7	0,08
8 - 7/8	2,00	18	26	60,5	8,5	0,16
8 - 10	3,15	25	32	68	10,8	0,3
8 - 13	5,30	29	35	87	15	0,70
8 - 16	8,00	34,5	40	108,4	19,8	1,10
8 - 20	12,50	41	48	121,5	24	1,80
8 - 22	15,00	48	51	141,5	26	3,20
8 - 26	21,20	57,5	60	158	30	4,50
8 - 32	31,50	67	77	205	37	9,0

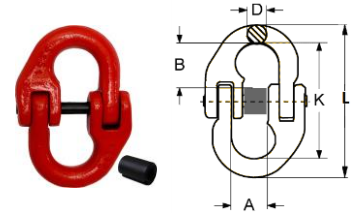

G 80 cuplă pentru chingi din poliester

G 80 webbing sling connecting link


TIP	Portanța WLL/To	A mm	B mm	K mm	E mm	W mm	Greut. kg
8 - 6	1,12	7	60	56	7	40	0,20
8 - 7/8	2,00	9,5	61,5	63,7	9,5	40	0,30
8 - 10	3,15	11	66	83	11	39	0,68
8 - 13	5,30	16,5	88	93,7	16,5	55	1,47
8 - 16	8,00	19,8	108	120	19,8	65,5	2,30
8 - 20	12,50	23	129	138	23	80	3,30



G 80 Cârlig sudabil

G 80 Welding hook


TIP	Portanța WLL/To	A mm	W mm	P mm	T mm	L mm	H mm	F mm	Greut. kg
8 - 7/8	2,00	5	114	26,5	20	92	24	34	0,83
8 - 10	3,20	6	129	30,5	24	106	30	36	1,20
8 - 13	5,30	10	171	34	28	133	43	44	2,46
8 - 16	8,00	12	177	34	38	136,5	51	51	3,26
8 - 20	10,00	15	223	51	39	169,5	55	53	5,17



G 80 Inel sudabil


G 80 Welding ring

TIP	Portanța WLL/To	A mm	B mm	D mm	M mm	Greut. kg
8 - 6	1,12	78	41	13	37	0,40
8 - 7/8	2,00	88	42	14	40	0,47
8 - 10	3,15	94	45	17	42,5	0,69
8 - 13	5,30	118	55	22	50	1,46
8 - 16	8,00	141	70	26,5	66,6	2,50
8 - 20	15,00	188	97	34	90	5,79

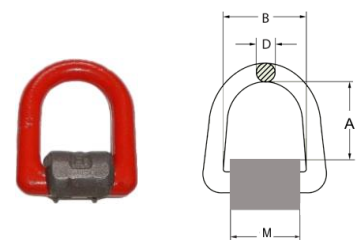

G 80 inel de ridicare cu cap rotativ (4.1)

G 80 Swivel eye bolt with ring

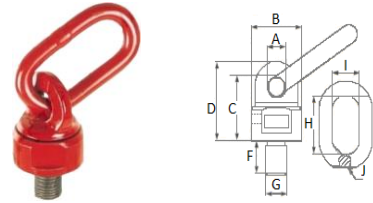


TIP	Portanța WLL/To		A mm	B mm	C mm	D mm	F mm	G mm	H mm	I mm	J mm	Greut. kg
	90°	0°										
M 8x13	0,30	0,60	15	36	41	51	13	8	55	30	13	0,41
M 10x18	0,45	0,90	15	36	41	51	18	10	55	30	13	0,43
M 12x18	0,50	1,00	15	36	41	51	18	12	55	30	13	0,44
M 16x20	1,12	2,00	15	36	42	52	20	16	55	30	13	0,46
M 20x30	2,00	4,00	19	49,5	56	68	30	20	70	35	16	0,96
M 24x30	3,15	6,30	22	57	65,5	78	30	24	85	40	18	1,45
M 30x35	5,30	10,60	23,5	66	80,5	96,5	35	30	85	40	20	2,17
M 36x50	8,00	11,80	27	80	89,5	109	50	36	115	50	22	3,6
M 39x90	8,00	11,80	27	80	89,5	109	90	39	115	50	22	3,71
M 42x50	10,00	15,00	27	80	89,5	109	50	42	115	50	22	3,95

Siguranță pentru cârlig cu ochi

spare parts for eye sling hook


TIP	Portanța WLL/To	A mm	B mm	C mm	D mm	Greut. kg
8 - 6	1,12	23,2	44	23	3	0,04
8 - 7/8	2,00	23,2	27,9	56,7	4,8	0,06
8 - 10	3,15	27,6	34,5	63,8	4,8	0,08
8 - 13	5,30	33,4	39,7	75,7	4,8	0,16
8 - 16	8,00	38,7	44	84,7	4,8	0,20
8 - 20	12,50	38,7	44	84,7	4,8	0,24

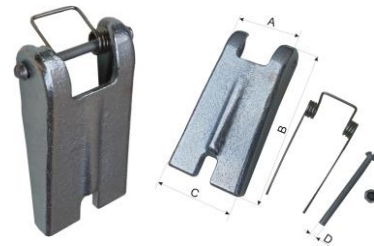

Siguranță pentru cârlig de lanț

spare parts for clevis sling hook


TIP	Portanța WLL/To	A mm	B mm	C mm	D mm	Greut. kg
8 - 6	1,12	23,3	44,2	17,5	3,8	0,04
8 - 7/8	2,00	25,8	52,1	19,6	3,8	0,06
8 - 10	3,15	28,2	63,2	22,2	3,8	0,08
8 - 13	5,30	36	78,5	26	3,8	0,16
8 - 16	8,00	36,7	85	26,3	3,8	0,18
8 - 20	12,50	42,4	94,8	36,3	3,8	0,24

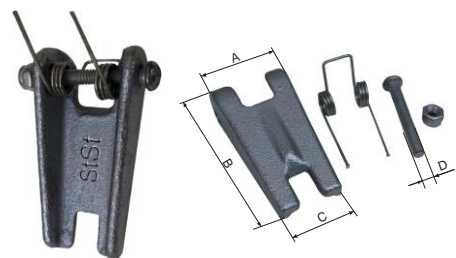


Siguranță pentru cârlig cu autoblocare

spare parts for self locking hook

TIP	Portanța WLL/To	A mm	B mm	C mm	D mm	Greut. kg
8 - 6	1,12	11,3	23	16,8	5,3	0,02
8 - 7/8	2,00	13	28,3	17,6	6,4	0,03
8 - 10	3,15	15,1	31,8	19,5	7,4	0,06
8 - 13	5,30	17	36,8	21	8,5	0,10
8 - 16	8,20	20,6	46,7	26,2	10,3	0,18
8 - 20	12,50	20,6	66,6	36,4	10,3	0,24

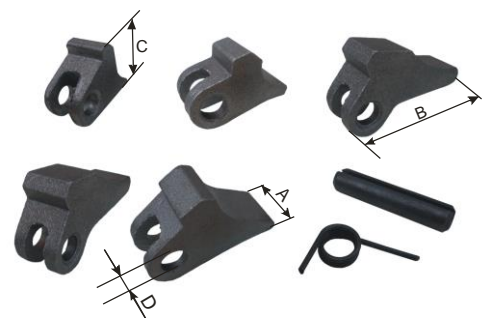


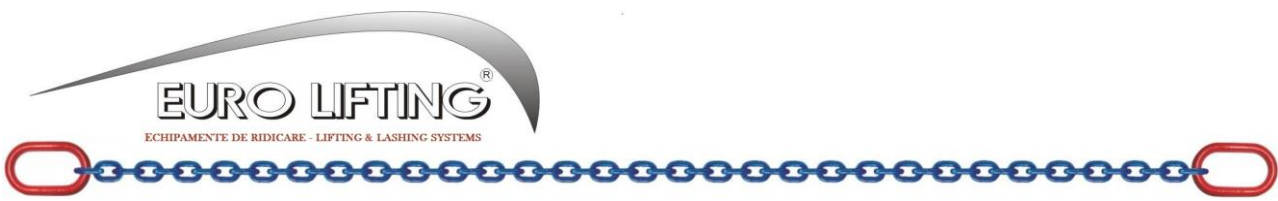

Lanț de ridicare G 100

High tensile G 100 chain

TIP d mm	Portanța WLL/To	P mm	Li mm	Le mm	Greut. kg/m
10 - 6	1,40	18	8,7	21,6	0,9
10 - 8	2,50	24	10,9	28,8	1,6
10 - 10	4,00	30	13,5	36	2,5
10 - 13	6,70	39	17,5	46,8	4,2
10 - 16	10,00	48	21,5	57,6	6,2
10 - 19	14,00	57	25,6	68,4	10
10 - 22	19,00	66	29,5	79,2	11,9
10 - 26	26,50	78	33,8	96,2	16,3

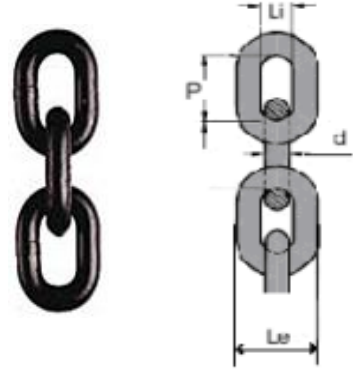


Portanța dispozitivelor din lanț de G 100


Working load limit of the G 100 chain slings

Caracteristica cea mai importantă a dispozitivelor din lanț de G 100 este că au o portanță mai mare cu 25% decât dispozitivele din lanț de G 80.

The most important attribute of G 100 chain slings is that they have 25% higher working load limit than the G 80 chain slings

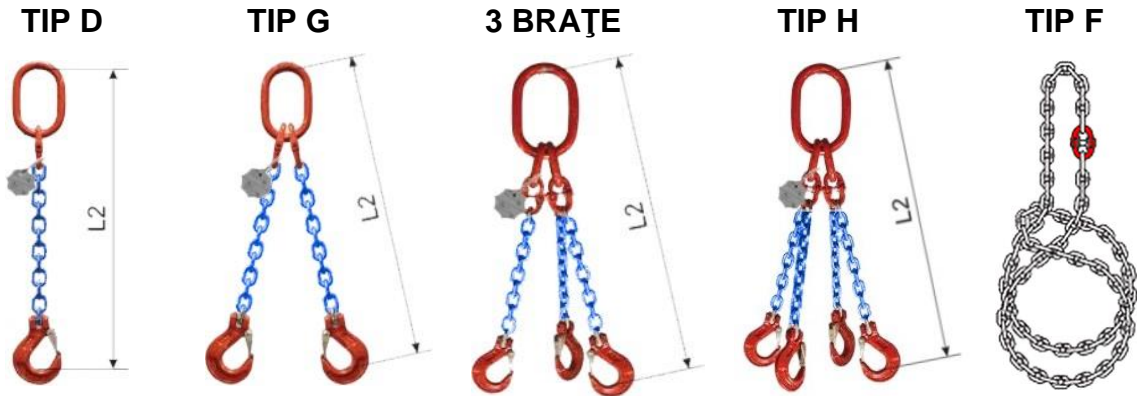


Diametru mm	1 braț	2 brațe 0° - 45°	2 brațe 45° - 60°	3brațe / 4brațe		Circulare
	WLL/kg					
10 - 6	1400	2000	1400	3000	2120	2240
10 - 8	2500	3550	2500	5300	3750	4000
10 - 10	4000	5600	4000	8000	6000	6300
10 - 13	6700	9500	6700	14000	10000	10600
10 - 16	10000	14000	10000	21200	15000	16000
10 - 20	16000	22400	16000	33600	24000	
10 - 22	19000	26500	19000	40000	28000	
10 - 26	26500	37100	26500	55650	39750	



G 100 inel simplu

G 100 master link


TIP mm	Portanța WLL/To	A mm	B mm	D mm	1 brat lant	2 brat lant	Greut. kg
10 - 10	1,40	80	50	10	5	5	0,14
10 - 13	2,30	110	60	13	6 + 7	6	0,34
10 - 16	3,50	110	60	16	8	7	0,53
10 - 18	5,00	135	75	18	10	8	0,86
10 - 22	7,60	160	90	23	13	10	1,60
10 - 26	10,00	180	100	27	16	13	2,46
10 - 32	14,00	200	110	33	19	16	4,14
10 - 36	25,10	260	140	36	22	19	6,22
10 - 45	30,80	340	180	45	26	22	12,85
10 - 50	40,00	350	190	50	32	26	16,55
10 - 56	60,00	400	200	60	---	32	27,01
10 - 72	81,50	460	250	70	---	---	45,00



G 100 inel triplu

G 100 master link assembly


TIP mm	Portanța WLL/To	D mm	L mm	B mm	D1 mm	L1 mm	B1 mm	Greut. kg
10 - 6	3,00	19	135	75	13	54	25	1,30
10 - 8	5,30	23	160	90	16,5	70	35	2,33
10 - 10	8,00	27	180	100	19	85	40	3,70
10 - 13	14,00	33	200	110	23	115	50	6,50
10 - 16	21,20	36	260	140	27	140	65	10,10



G 100 cuplă de lanț

G 100 connecting link


TIP mm	Portanța WLL/To	A mm	B mm	D mm	K mm	H mm	Greut. kg
10 - 6	1,40	14	18	7,6	44,5	60	0,07
10 - 8	2,50	18,5	26	10	61,5	84,5	0,20
10 - 10	4,00	23	32	12,6	72	97,2	0,35
10 - 13	6,70	27,5	35	16,8	89	127	0,74
10 - 16	10,00	33,5	40	21	103	145	1,16
10 - 20	16,00	42	48	24,5	116	175	2,05
10 - 22	19,00	48	51	27	135	193	3,10
10 - 26	26,50	61	60	32	164	228	6,80
10 - 32	39,30	80	77	40	194	274	8,50



G 100 scurtător

G 100 shortening grab hook


TIP mm	Portanța WLL/To	A mm	B mm	C mm	D mm	E mm	Greut. kg
10 - 6	1,40	14,5	30,5	43,5	82	8	0,20
10 - 8	2,50	18	37	53	108	10,8	0,28
10 - 10	4,00	22,5	48,5	42	135,5	13,5	0,72
10 - 13	6,70	28	59	96	175,5	16,5	1,60
10 - 16	10,00	36	74	112,5	210	19,2	2,45
10 - 20	16,00	43,5	89,5	143	240	24,0	4,72
10 - 22	19,00	48,5	100,5	160,5	271	27,0	8,2



G 100 cârlig cu ochi și siguranță

G 100 eye sling hook


TIP	Portanța WLL/To	O mm	D mm	A mm	R mm	H mm	Greut. kg
10 - 6	1,40	20,5	10	18,5	111	21	0,32
10 - 8	2,50	25	11	25	137,5	27,5	0,6
10 - 10	4,00	34	16	28	171,5	33	1,2
10 - 13	6,70	43	19	38	219	43,5	2,2
10 - 16	10,00	50	24,5	44	260	50	3,5
10 - 20	16,00	55	27	52	298	56	7,15
10 - 22	19,00	60	29	66	330	62	11,5
10 - 26	26,50	70	35	73	367	75	14
10 - 32	39,30	66	39	87	427	89	17,5



G 100 cârlig pentru lanț

G 100 clevis sling hook


TIP mm	Portanța WLL/To	A mm	B mm	C mm	D mm	E mm	F mm	Greut. kg
10 - 6	1,4	7,5	32	21	109	18,5	68,5	0,33
10 - 8	2,5	9,5	37	27,5	134	25	88	0,70
10 - 10	4,0	12	48	33,5	161,5	28	105,5	1,30
10 - 13	6,7	15	59	42	203	38	134	2,30
10 - 16	10	17,5	70	50	248	44	160,5	3,60
10 - 20	16	25	85	56	297	52	190,5	7,30
10 - 22	19	27	100	62	326	66	215,5	12,1



G 100 cârlig pentru lanț cu autoblocare

G 100 self locking clevis hook

TIP mm	Portanța WLL/To	A mm	B mm	C mm	L mm	M mm	R mm	Greut. kg
10 - 6	1,4	7,5	32	28	131	70	96	0,55
10 - 8	2,5	9,5	36	35,5	166	90	123	0,95
10 - 10	4,0	12	46	45	196,5	109	144	1,60
10 - 13	6,7	15	59	53,5	251	138,5	182	2,90
10 - 16	10	17,5	70	62	303	170,5	217	5,80
10 - 20	16	25	85	76,6	337,5	192,5	235	8,60
10 - 22	19	25,5	98	80	391	205	276,5	12,10



G 100 cârlig rotativ

G 100 rotating hook

TIP	Portanța WWL/To	A mm	B mm	P mm	H mm	K mm	D mm	Greut. kg
10 - 6	1,4	32,5	23	28	20	184	11,5	0,60
10 - 8	2,5	36	28	35,5	26	229	13	1,10
10 - 10	4	42	35	45	30	269	15,5	2,00
10 - 13	6,7	50	40	53,5	40,5	330	17	4,00
10 - 16	10	61	56	62	50,5	413	21,5	6,80
10 - 20	16	72	62	76,5	62	463	26	12,50
10 - 22	19	97	94	80	66	572	33	17,10

